

9.5

<http://tiny.cc/9seriesEN>**NEW**

LIFT CAPACITY
2600
kg



ENGINE POWER
50
hp



SPEED
25
km/h



FLOW RATE
85
l/min



LIFT HEIGHT
3,21
m



Model	9.5
Engine	Yanmar 4TNV88
Power (Iso Gross)	50 HP / 37 kW
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.) - 2 speed	12-25 km/h (7,5-15.5 mph)
Aux. hydraulics oil flow	85 l/min (22.5 gal/min)
Max. lifting height	3,21 m (126.4 in)
Max lifting capacity (w/backweights)	2600 kg (5732 lbs)
Breakout force / 50 cm	2200 kg (4850 lbs)
Pushing force (c)	1750 kgf (1750 kp)
Specific ground pressure (w/standard tires)	843 kg/m ² (1858 lbs/sqft)
Turning radius: inside/outside	1030/2550 mm (40.5/100.4 in)
Standard tires (Tractor profile)	31X15.50-15 (400/50-15)
Weight	2025 kg (4464 lbs)
Product Code	C965000
Price	Get a Quote

Features

- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Torque divider
- Self-levelling double-H telescopic boom
- 11-functions joystick
- Multi-disk parking brake
- Radial Piston Wheel Motor
- 2 Speed
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable suspension seat with armrests and safety belt.

Tires size	Width (N)	Height (Q)
31X15.50-15	1500 mm (59 in)	2150 mm (84.6 in)
29X12.50-15	1420 mm (55.9 in)	2100 mm (82.7 in)

9.5 FEATURES AND OPTIONS

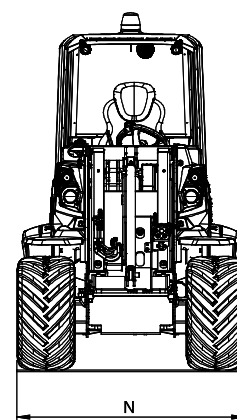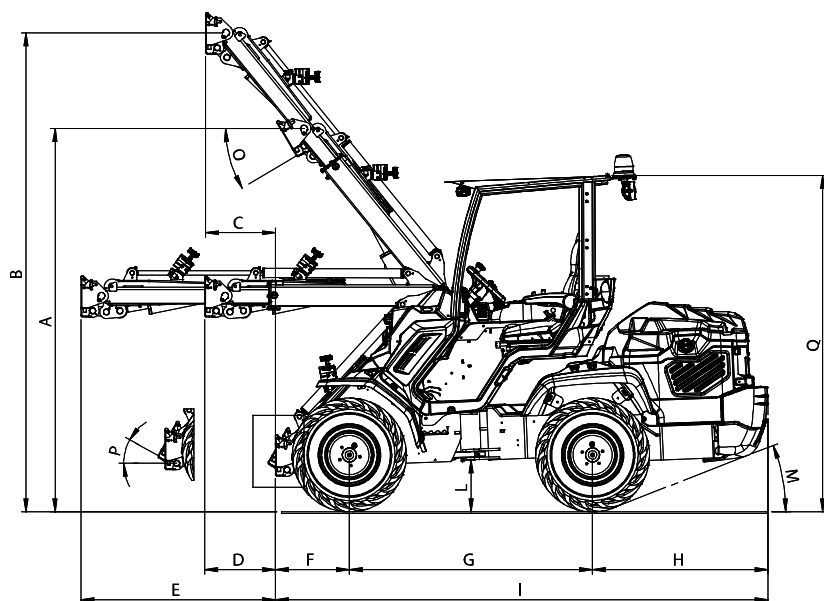

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2530/99.6	I - Machine length	3380/133
B - Pivot point height (extended boom)	3210/126.4	L - Ground clearance	340/13.4
C - Outreach with lifted boom (extended boom)	460/18	M - Angle of departure (with/without backweights)	22°/28°
D - Outreach with horizontal boom (not extended)	460/18	N - Max width (with standard tires)	1500/59
E - Outreach with horizontal boom (extended)	1280/50.4	O - Dump angle	31°
F - Front length	490/19.3	P - Rollback angle	29°
G - Wheelbase	1600/63	Q - Height (with standard tires)	2150/84.6
H - Rear length	1230/48.4	Q1 - Height with A/C (with standard tires)	2350/92.5

9.5 FEATURES AND OPTIONS

Options	Code	Price
Floating boom valve	C883011	Get a Quote
Luxury cabin (glass) with inner clothing	C883001	Get a Quote
Heating system	C883903	Get a Quote
Plexiglass windscreen (smart cabin)	C883000	Get a Quote
Plexiglass right side (smart cabin)	C883034	Get a Quote
Plexiglass back window (smart cabin)	C883035	Get a Quote
Led Road lights "Hella"	C883010	Get a Quote
3 aux. working led light "Hella"	C883018	Get a Quote
Automatic locking plate	C883008	Get a Quote
Attachment coupling plate for rear mounting	C880031	Get a Quote
3 lines multiconnector kit, to old quick coupling	C880221	Get a Quote
Trailer coupling	C885017	Get a Quote
Additional backweights (184 kg / 406 lbs)	C880054	Get a Quote
Additional backweights (440 kg / 970 lbs)	C885025	Get a Quote
Back up alarm	C883021	Get a Quote
"Luxury" heated seat	C883006	Get a Quote
220 V engine block heater	C885250	Get a Quote
110 V engine block heater	C885255	Get a Quote
Left protection bar for operator	C883020	Get a Quote
Rear 12V electric socket	C883023	Get a Quote
Air conditioning	C883900	Get a Quote
Rear hydraulic outlets - single	C883015	Get a Quote
Rear hydraulic outlets - double	C883016	Get a Quote
Aux front hydraulic outlets	C883026	Get a Quote
Aux front and rear hydraulic outlets - double	C883027	Get a Quote
Wheel spacer 10 mm (0.2 in) (max. 1 pcs for wheel)	C880090	Get a Quote
Wheel spacer 55 mm (2.2 in), set of 4	C885010	Get a Quote
Biodegradable oil	C883032	Get a Quote
Snow chains for wheel	see page 99	Get a Quote
Driver area cover	C883019	Get a Quote