


	K.327	K.333
A	485	485
B	1100	1100
C	795	795
D	2380	2380
E	563	563
F	1875	1875
G	1050	1050
H	1985	1985



Rondo

www.antoniocarraro.com

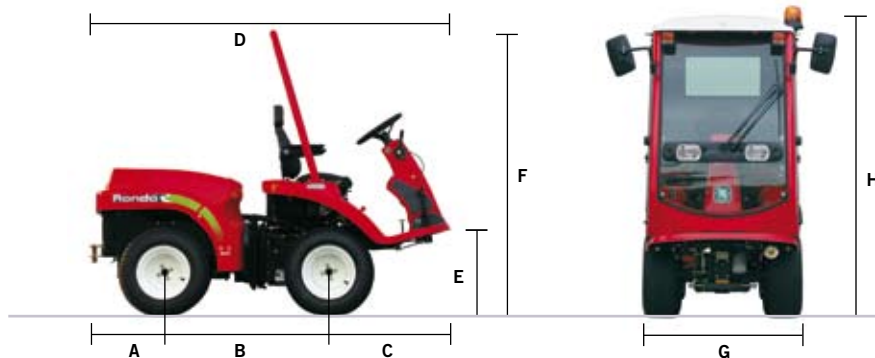

K.327

K.333

Chassis*	Articulated and oscillating chassis ACTIF™ • 10° oscillation on rear axle • Four wheel drive, integral traction	
Engine Type	Diesel, indirect injection	Diesel, direct injection
N. cylinders	3	3
Capacity cc.	1006	1331
Power kW/CV (97/68/CE)	16/22	22/30
Max rpm	3000	3000
Max torque (Nm/giri)	63/1600	85/1600
Cooling	Water	Water
Tank capacity (l.)	50	50
Transmission*	Hydrostatic • 2 speeds: Slow and Fast • Double pedal speed control in both drive directions	
Working speed Km/h	Forward from 0 to 15 - Reverse from 0 to 8	
Road speed Km/h	Forward from 0 to 25 - Reverse from 0 to 14	
PTO	Completely independent with oil bath multidisk clutch - Electrohydraulic engagement	
Speed	1000 rpm to 2525 rpm	
Shaft	DIN 5482 - 25x22	
Brakes	Oil bath monodisk	
Hydraulic Lift*	Antonio Carraro exclusive platform system with floating position	
Capacity Kg	500	
Steering	1 hydraulic piston	
Steering column*	with wide adjustment of inclination	
Brakes	Standard: brake drums on front wheels - Safety and parking: mechanical on front wheels	
Tyres	23x10.50-12 Garden Trelleborg	
Weight in speed order Kg	780	800
With cab Kg	910	930
Standard Features	Front differential locks • Sprung, adjustable seat with armrests and double back rest • Trailer hook • Roll bar • Safety device on seat and brakes • unipolar tappet • Battery 55 Ah • Automatic disengagement device of the PTO when lifting equipment	
Optional	Cab with ventilation/heating and air recycle • Road homologation Kit • Pair of rear stabilizers • 1 double effect rear distributor • Winter kit: 1 double effect rear distributor with flow distribution control + 1 double effect front distributor	
	• Supports for top fitting equipment • Four 60 mm spacers • Wheel ballasts Kg. 40 each • Rear ballasts Kg. 10 each	

Mowers	RT 1500 HDS*	R 1200 HD	R 1500 HD	RP 1500 HD
Type	With turbine and CR 1000*	Lateral discharge - Turbine kit	Lateral discharge	Rear discharge
Plate construction	Pressed steel, th. 4 mm	Pressed steel, th. 4 mm	Pressed steel, th. 4 mm	Pressed steel, th. 4 mm
Number of blades	3	3	3	3
Number of Belts in Kevlar	2 for blades, 1 for turbine	1 for blades, 1 for turbine	1	1
Mulching kit	Not available	Optional	Optional	Optional
"Endurans" blades kit	Optional	Optional	Optional	Optional
"High grass" blades kit	Optional	Not available	Optional	Not available
Cutting width	1500 mm	1200 mm	1500 mm	1500 mm
Adjustment of cutting height	15 ÷ 90 mm	15 ÷ 90 mm	15 ÷ 90 mm	15 ÷ 90 mm

*PATENT PENDING

The descriptions and illustrations of this brochure are for information purposes only and the company reserves the right to change them at any time without notice.

Antonio Carraro spa
Via Caltana, 24
35011 Campodarsego Padova
Tel +39 049 9219921
Fax +39 049 9219944
E-mail info@antoniocarraro.it

