

MAJOR SPECIFICATIONS

ITEM	SX26	
Engine		
Model	S773L-EU	
Number of cylinders	3	
Total displacement	cc	1,131
Bore and stroke	mm(in)	77×81(3.0×3.2)
Engine gross power	HP(kw)	26.0 (19.4)
P.T.O power	HP(kw)	20.5 (15.3)
Rated revolution	rpm	3,000
Capacities		
Fuel tank	ℓ (U.S gal)	25.5 (6.75)
Transmission oil	ℓ (U.S gal)	13.0 (3.4)
Front axle oil	ℓ (U.S gal)	2.0 (0.5)
Drive train		
Clutch	—	
Transmission	Shuttle	Infinite
	Main	HST
	Range	2 range (High/Low)
	Speeds	—
Ground speed(Tire for industrial) km/h (mp/h)	Forward 3,000rpm	0-16.6 (0-10.3)
	Reverse 3,000rpm	0-11.2 (0-7.0)
4-wheel drive	Mechanical	
Quick turn(QT)	None	
Brake	Wet disk type	
Differential lock	Standard for rear axle	
Tires		
Agricultural	Front	—
	Rear	—
Industrial	Front	18×8.5-8 R4
	Rear	26×12.00-12 R4
Turf	Front	18×8.5-8 R3
	Rear	26×12.00-12 R3
Hydraulic system		
Pump capacity	ℓ /min(gpm)	24.6 (6.5)
Steering	Hydraulic Power Steering	
3-point hitch	SAE Category I	
Max. lifting capacity kg(lbs.)	61cm(24in) Behind	318 (700)
	Lower link end	715 (1,580)
P.T.O		
Rear	Type	Independent
	P.T.O shaft	1-3/8" 6 splines
	Speed (P.T.O rpm/engine rpm)	540/3,000
Mid	P.T.O shaft()★	16/32" 15 splines
	Speed (P.T.O rpm@engine rpm)	2,200@3,020
Min. turning radius	m(feet)	2.54 (8.33)
Weight (with ROPS)	kg(lbs)	700 (1,543)

(★) In compliance with A.S.A.E. standards

※We reserve the right to discontinue models or change specifications without notice.

SUBCOMPACT TRACTOR

SX26

SHIBAURA



⚠ Important information

●Improper use of any product may cause serious or fatal injury. Read carefully the operating and safety instructions in your owner's manual before use.

SHIBAURA
IHI Shibauro Machinery Corporation

GENERAL CONTACT - dept2@ism.ihi.co.jp
URL:www.ihi-shibauro.com/english

INT-TR-SX-1409-DN-10

IHI GROUP
Realize your dreams

LEVERS




Various levers (HST Hi-Lo range shift, PTO select/clutch, etc.) are arranged either side of the operator seat in an optimal layout to ensure comfortable operation.

POWER STEERING



Power steering as standard means less operator fatigue, even under tough conditions.

SHIBAURA ENGINE

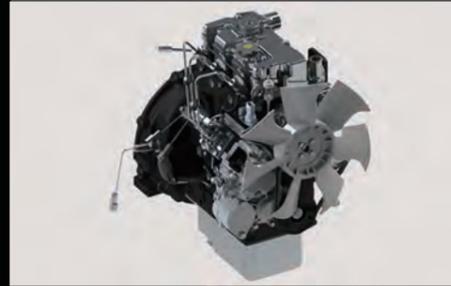

Reliable and fuel-efficient SHIBAURA S773L diesel engine.

OPTIONAL IMPLEMENTS

Front Loader : FL26



SPECIFICATIONS (with SX26)

- Counter Ballast : 478.5kg (1,055lbs)
- Maximum Lift Height To Pivot Pin : 1,810mm (71.3in)
- Maximum Lift Height Under Level Bucket : 1,638mm (64.5in)
- Clearance With Bucket Dumped @ 45 Degrees : 1,298mm (51in)
- Reach At Maximum Lift Height : 678mm (26.7in)
- Maximum Dump Angle : 45°
- Reach With Bucket on Ground : 1,332mm (52.4in)
- Maximum Rollback Angle : 27°
- Dig Depth : 130mm (5.1in)
- Overall Height In Carry Position : 925mm (36.4in)
- Depth (Horizontal Distance) : 507mm (19.9in)
- Height (Overall Vertical Height) : 459mm (18.1in)
- Length (Horizontal Distance) : 588mm (23.1in)
- Lift Capacity to Maximum Height @ Bucket Pivot Pin : 306.3kg (75.3lbs)
- Breakout force at Bucket Pivot Pin : 604kg (1,332lbs)
- Bucket rollback force at ground line : 604kg (1,332lbs)
- Relief valve setting (Loader control valve) : 130-135kg/cm
- Rated flow (Tractor system) : 13.4l/min (3.5 gpm) 3,000rpm
- Attachment (Bucket size) : 48in (QA)

REAR PTO & 3-POINT HITCH




Combined with the rear PTO and SAE category-1 three-point hitch, a variety of implements and attachments can be fitted according to the type of works.

HOOD



An extremely wide-opening hood provides good serviceability to the engine, air filter, and electrical components.

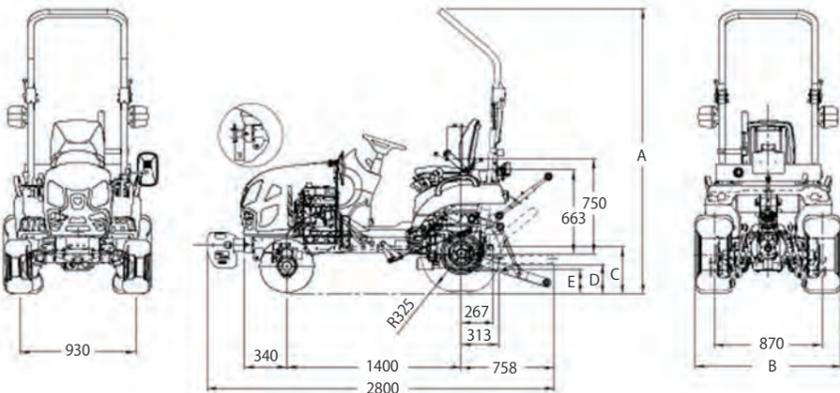

	TURF	INDUSTRIAL
FRONT	18×8.5-8 R3	18×8.5-8 R4
REAR	26×12.00-12 R3	26×12.00-12 R4
A	2280	2285
B	1270	1183
C	370	375
D	234	239
E	195	200

TIRE



Turf tire (left) & Industrial tire (right)

Mid Mount Mower : SXM60



SPECIFICATIONS

- Suitable Tractor : SX26
- Mounting Method : Suspended
- Adjustment Of Cutting Height : Linkage 7 Step (0.5"Step)
- Cutting Width : 1,524mm (60in)
- Weight (Approx) : 113kg (249lbs)
- Deck Thickness : 3.2mm (0.13in)
- Blade Spindle Speed : 2,888rpm (48.1r/s)
- Blade Tip Velocity : 78.2m/s (256.6fpm)
- Blade Length : 517mm (20.4in)
- Number Of Blades : 3
- Dimension : Total Length 962mm (37.9in)
Total Width 1,865mm (73.4in)
Total Height 273mm (10.8in)