







6.3S

<http://tiny.cc/6seriesEN>


 LIFT CAPACITY 1200 kg	 ENGINE POWER 28 hp	 SPEED 15 km/h	 FLOW RATE 46 l/min	 LIFT HEIGHT 2,92 m
---	---	---	--	--

Model	6.3S
Engine	Yanmar 3TNV76
Power (Iso Gross)	28 HP / 21 kW
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.)	15 km/h (9.3 mph)
Aux. hydraulics oil flow	46 l/min (12.2 gal/min)
Max. lifting height	2,92 m (115 in)
Max lifting capacity (w/backweights)	1200 kg (2646 lbs)
Breakout force / 50 cm	1400 kg (3086 lbs)
Pushing force (c)	1160 kgf (1160 kp)
Specific ground pressure (w/standard tires)	1044 kg/m ² (2301 lbs/sqft)
Turning radius: inside/outside	905/2020 mm (35.6/79.5 in)
Standard tires (Tractor profile)	23X8.50-12
Weight	1430 kg (3153 lbs)
Product Code	C961005
Price	Get a Quote


Features

- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- 11-functions joystick
- Multi-disk parking brake
- Radial Piston wheel motor
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable suspension seat with armrests and safety belt.

Tires size	Width (N)	Height (Q)
23X8.50-12	1070 mm (42 in)	2020 mm (79.5 in)
23X10.50-12	1130 mm (44.5 in)	2020 mm (79.5 in)
26X12.00-12	1300 mm (51.2 in)	2040 mm (80.3 in)
27X8.50-15	1070 mm (42.1 in)	2080 mm (81.9 in)
27X10.50-15	1150 mm (45.3 in)	2080 mm (81.9 in)



6.3S FEATURES AND OPTIONS

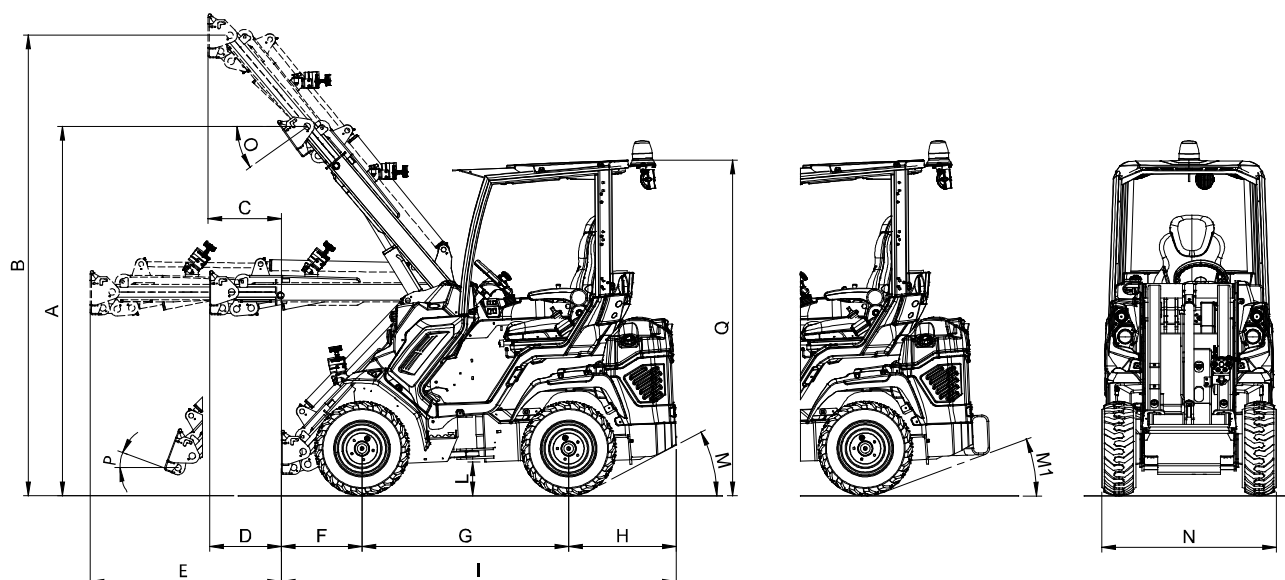

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2290 / 90.1	I - Machine length	2445 / 96.3
B - Pivot point height (extended boom)	2920 / 115	L - Ground clearance	210 / 8.3
C - Outreach with lifted boom (extended boom)	455 / 17.9	M - Angle of departure	28°
D - Outreach with horizontal boom (not extended)	445 / 17.5	M1 - Angle of departure with backweights	21°
E - Outreach with horizontal boom (extended)	1185 / 46.6	N - Max width (with standard tires)	1070 / 42
F - Front length	500 / 19.7	O - Dump angle	36°
G - Wheelbase	1280 / 50.4	P - Rollback angle	29°
H - Rear length	665 / 26.2	Q - Height (with standard tires)	2020 / 79.5

6.3S FEATURES AND OPTIONS

Options	Code	Price
Torque divider	C883600	Get a Quote
Floating boom valve	C883011	Get a Quote
Luxury cabin (glass) with inner clothing	C883001	Get a Quote
Heating system	C883601	Get a Quote
Plexiglass windscreen (smart cabin)	C883000	Get a Quote
Plexiglass right side (smart cabin)	C883034	Get a Quote
Plexiglass back window (smart cabin)	C883035	Get a Quote
Led Road lights "Hella"	C883009	Get a Quote
3 aux. working led light "Hella"	C883018	Get a Quote
Automatic locking plate	C883008	Get a Quote
Attachment coupling plate for rear mounting	C880031	Get a Quote
3 lines multiconnector kit, to old quick coupling	C880221	Get a Quote
Trailer coupling	C885014	Get a Quote
Additional backweights (184 kg / 406 lbs)	C880054	Get a Quote
Back up alarm	C883021	Get a Quote
"Luxury" heated seat	C883006	Get a Quote
220 V engine block heater	C885250	Get a Quote
110 V engine block heater	C885255	Get a Quote
Left protection bar for operator	C883020	Get a Quote
Rear 12V electric socket	C883022	Get a Quote
Rear hydraulic outlets - single	C883013	Get a Quote
Rear hydraulic outlets - double	C883014	Get a Quote
Aux front hydraulic outlets	C883024	Get a Quote
Aux front and rear hydraulic outlets - double	C883025	Get a Quote
Wheel spacer 10 mm (0.2 in) (max. 3 pcs for wheel)	C880090	Get a Quote
Wheel spacer 55 mm (2.2 in), set of 4	C885010	Get a Quote
Biodegradable oil	C883007	Get a Quote
Snow chains for wheel	see page 99	Get a Quote
Driver area cover	C883019	Get a Quote