





We set out to build a utility vehicle that is simply superior to the rest.

The result is the grounds and turf crossover Workman GTX. It boasts an unequalled combination of comfort, utility and control that makes it simply superior to the competition. Its power, steering and exclusive suspension and braking systems make the Workman GTX the most versatile, practical, and comfortable utility vehicle in its class. So whether you are changing cups, checking on irrigation, working around campus, or moving people or materials, the Workman GTX has the power and versatility to get the job done right.












WE MADE IT LIGHTER AND STRONGER TO GIVE IT SUPERIOR POWER

Whether you choose the 429 cc petrol or 48 volt electric Workman* GTX, power and performance come standard. An impressive power to weight ratio boosts payload capacity and productivity. The Workman GTX is the smarter, more efficient way to get the job done!

WORKMAN® GTX SUPERIOR VERSATILITY

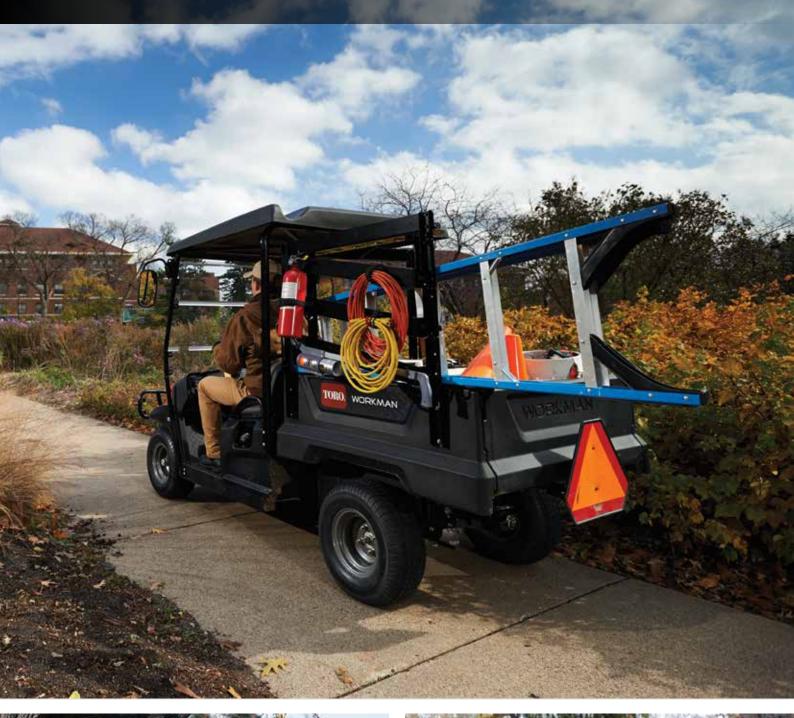







WE MADE IT FIT YOUR NEEDS. ALL OF THEM.

Introducing your new vehicle, watering rig, people mover, utility cart, toolbox, irrigation cart, material hauler, cruiser, garbage collector, crew shuttle, equipment transporter ... best friend. The Workman* GTX is adaptable for any task. Two or four-seat configurations come with bench or bucket seats. Front and rear attachment points for garbage cans, hose reels or walk spreaders free up the bed for more hauling capacity. 4ft (1.2 m) and 6ft (1.8 m) flat beds are available. With over 300 unique configurations available, you are sure to find the one that fits your needs.









We were tougher on it than you will ever be.

Virtually unbreakable exterior components and a powder coated frame and underbody give the Workman GTX superior durability. How do we know? We pushed it to the limits with the most punishing field and labs tests. The Workman GTX has been through it all so you can run it hard, day after day with confidence.

SUPERIOR DETAILING

We made sure to do the little things right

We didn't think of everything. You did. We just listened. We gave it hydraulic disc brakes to minimize maintenance and provide consistent, safe stopping. Full access to the engine compartment makes services a breeze. Storage is abundant and two standard USB ports make a dead phone on the job a thing of the past.





WE BROKE THE MOULD TO GIVE IT THE MOST COMFORTABLE RIDE

Coil-over shocks on all four tyres deliver greater suspension travel and adjustability resulting in a smoother ride and minimized operator fatigue. We also made it the only vehicle in its class to feature a split frame to further increase ride comfort.





WORKMAN® GTX SPECIFICATIONS

	PETROL - MODEL 07130		ELECTRIC - MODEL 07131			
POWER SYSTEM	429 cc, air-cooled, single-cylinde	Kohler® petrol engine.	48V brushless AC in	duction drive.		
STEERING	Rack and pinion steering system with ergonomically positioned column. Steering wheel has 2.75 turns lock-to-lock with 13.75" (35 cm) diameter.					
TURNING RADIUS	Turning clearance circle: 20.7' (6.3 m) Inside turning radius: 60.25" (153 cm)					
BRAKES	Front and rear wheel hydraulic disc brakes					
SUSPENSION	FRONT - Modified MacPherson Strut. REAR - Articulating Swing Arm. Adjustable Coil Over Shocks at all four wheels.					
SUSPENSION TRAVEL	Front Suspension Travel: 3.5" Rear Suspension Travel: 4".					
FUEL CAPACITY	5 gallons (18.9 litres)		N/A			
GROUND SPEED	16 mph (25.6 km/h) governed.					
TRANSAXLE	N/A		17:1 double-reduction high torque.			
GROUND CLEARANCE	Front: 8.5" (21.6 cm), Rear: 6.1" (15.5 cm)					
TYRES	20 x 8-10, 4-ply					
BATTERIES	One 12-volt starter battery		Eight Trojan® Advanced Deep Cycle 6V batteries featuring a single port fill system and water level indicators.			
CONTROLLER	N/A		540 amps max with regenerative motor braking, roll-away protection, thermal cutback, sealed & waterproof, status light and three power modes.			
CHARGER	N/A	On-board high efficiency 1kW smart charger with global input, temperature controlled, sealed & waremote indicator viewable at charge port.		ed & waterproof,		
ELECTRIC MOTOR	N/A		Brushless high-torque AC Induction motor with 5.0kW continuous power.			
INSTRUMENTS/DASH	Hour meter, fuel gage, USB power port, headlight switch, on/off ignition key switch, gear selector and parking brake lever. Two cup holders, radio holder and three in-dash storage compartments.		Hour meter, battery level indicator, USB power port, headlight switch, on/off ignition key switch, gear selector and parking brake lever. Two cup holders, radio holder and three in-dash storage compartments.			
STARTING	Pedal or key start capability standard.					
DIMENSIONS	Vehicle Configuration	Width	Length	Height	Wheel Base	
	2-Seat with Bed	47" (1.2 m)	119" (3 m)	50.2" (1.3 m)	86.6" (2.2 m)	
	4-Seat with Bed	47" (1.2 m)	144" (3.6 m)	50.2" (1.3 m)	114" (2.9 m)	
	2-Seat with 1.8 m (6') Flat Bed	47" (1.2 m)	156" (3.9 m)	50.2" (1.3 m)	114" (2.9 m)	
WEIGHT	Vehicle Configuration	Weight	Vehicle Configurat	•		
	2-Seat with Bed	875 lbs. (397 kg)	2-Seat with Bed		5 lbs. (633 kg)	
	4-Seat with Bed	1150 lbs, (522 kg)	4-Seat with Bed		0 lbs. (757 kg)	
	2-Seat with 1.8 m (6') Flat Bed	1264 lbs. (573 kg)	2-Seat with 1.8 m	(6') Flat Bed 178	4 lbs. (809 kg)	
CARGO BED		ength	Height	Capaci		
	38.5 " (97.8 cm) 41) " (101.6 cm)	11" (27.9 cm)	800 (0)	s. (363 kg) *	
VEHICLE CAPACITY	2-seat with bed: 1200 lbs. (544 kg)					
TOWING CAPACITY	1,000 lbs. (454 kg) Class 1 - 32mn	1,000 lbs. (454 kg) Class 1 - 32mm receiver standard.				
OPTIONAL ACCESSORIES	Canopy, solid folding windshield, 4-seat configuration, flat bed, 6' (1.8 m) flat bed, bench seat, underhood storage, hose reel mounting bracket, walk spreader carrier, trash can mount, bed racking, electric bed lift, brush guard, 12V outlet, Brake/tail/signal lights, ROPS certified hard cab, horn kit, back up alarm kit, parking brake alarm kit, L-track attachment system and all-terrain tyre kit.					
WARRANTY	Two-year or 1500 hour limited wa	rranty. Three-year engine	e warranty. Refer to the	e Opertator's manual	for further details.	
				* Accume	s two 91ka (200 lb) passenge	

* Assumes two 91kg (200 lb) passengers

toro.com

Worldwide Headquarters The Toro Company 8111 Lyndale Ave. So. Bloomington, MN 55420 U.S.A. Phone: (1) 952 888 8801 Fax: (1) 952 887 8258

Printed in U.S.A. ©2016 The Toro Company. All Rights Reserved. 200-6680 GB







facebook.com/ToroCompany twitter.com/TheToroCompany youtube.com/ToroCompanyEurope

