



from 100 to 220 HP



Ø 30 cm max



D30 cm


FORESTRY TILLER WITH FIXED TOOTH ROTOR.

A Forestry Tiller designed to meet the needs of professionals who require both surface clearing and soil reclamation. This machine allows you to clean up crop residue and grind trees and stumps up to 30 cm diameter and 30 cm deep. The optional push frame mounts to the support roller, while adjustable counter-blades are used to manually control the final product size.



| STANDARD EQUIPMENT |
|--------------------------------|
| Friction clutch on side PTO |
| PTO shaft with cam clutch |
| Gearbox with freewheel |
| Transmission with side gearbox |
| Hydraulic hood |
| Welded steel counter-blades |
| Adjustable counter-blade |
| Enclosed machine body |
| Inside lateral protections |
| Protection chains |

| OPTIONS |
|--|
| Hydraulic top link |
| Push frame - (cannot be used without roller) |
| Hydraulic support roller |
| Multiple tooth options |

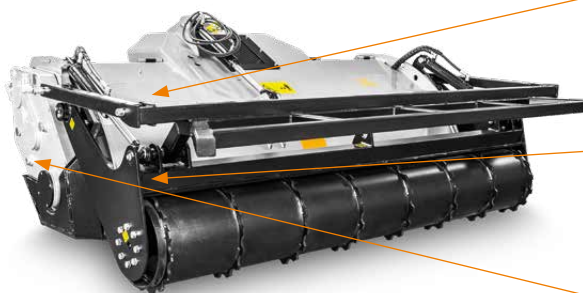

Adjustable counter-blade
for longer working life



Hydraulic controlled roller
(optional) helps with compaction and working uneven terrain

Dual transmission with side gearbox
reduces rotor speed while maintaining power

| MODEL | Tractor (HP) | | PTO (rpm) | Working width (mm) | Total width (mm) | Weight (kg) | Max shredding diameter (mm) | Max working depth (mm) | No. teeth type B/3 + C/3/SS |
|------------------|--------------|-----|-----------|--------------------|------------------|-------------|-----------------------------|------------------------|-----------------------------|
| | min | max | | | | | | | |
| SSL Speed 150 | 100 | 160 | 1000 | 1580 | 1880 | 2000 | 300 | 300 | 44+4 |
| SSL Speed 175 | 110 | 160 | 1000 | 1820 | 2120 | 2160 | 300 | 300 | 50+4 |
| SSL/DT Speed 200 | 120 | 220 | 1000 | 2060 | 2360 | 2600 | 300 | 300 | 58+4 |
| SSL/DT Speed 225 | 130 | 220 | 1000 | 2300 | 2600 | 2810 | 300 | 300 | 66+4 |
| SSL/DT Speed 250 | 140 | 220 | 1000 | 2540 | 2840 | 3030 | 300 | 300 | 74+4 |

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.