

FORESTRY TILLERS

SSM - SSM/HP



from **150 to 300 HP**



Ø **50 cm max**



D40 cm

FORESTRY TILLER WITH FIXED TOOTH ROTOR.

Designed and built to work with medium to high power tractors, the SSM can grind stumps up to 50 cm diameter and run at a depth of 40 cm. It has an available HP version for tractors up to 300 HP.



STANDARD EQUIPMENT

Friction clutch on side PTO
PTO shaft with cam clutch
Gearbox with freewheel
Transmission with side gearbox
Hydraulic hood
Welded steel counter-blades
Flat pressed welded steel protection counter-blades
Adjustable hardox counter-blade
Enclosed machine body
Centralized greasing hub
Hydraulic top link

Z style self ranging system of the PTO drive shaft/gearbox

Inside lateral protections

Bigger transmission for tractors up to 360-400 HP (SSM/HP 200, 225 and 250)

Protection chains

OPTIONS

Adjustable counter-blade


Bolted grid on rear hood

W style self aligning device between PTO drive shaft/gearbox

Dozing blade (not compatible with roller)

Hydraulic controlled roller (not compatible with dozing blade)

Multiple tooth options

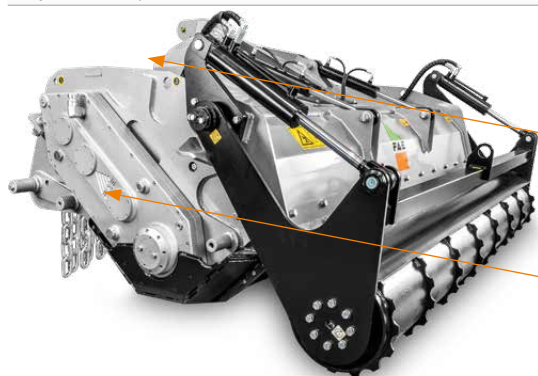

W style self aligning device between PTO drive shaft/gearbox

allows the mulcher to work in several angles without damaging the PTO

Stronger transmission for tractors up to 360-400 HP power
(SSM/HP 200, 225 and 250)

MODEL	Tractor (HP)		PTO (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	Max shredding diameter (mm)	Max working depth (mm)	No. teeth type A/3 + MH
	min	max							
SSM 200	150	250	1000	2080	2410	3090	500	400	76+4
SSM 225	170	250	1000	2320	2650	3340	500	400	88+4
SSM 250	190	250	1000	2560	2890	3590	500	400	102+4
SSM/HP 200	150	300	1000	2080	2410	3140	500	400	76+4
SSM/HP 225	170	300	1000	2320	2650	3390	500	400	88+4
SSM/HP 250	190	300	1000	2560	2890	3640	500	400	102+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.